



LA7640N

Chroma Circuit for SECAM-system Color Television Sets

Overview

The LA7640N houses the chroma circuit for a SECAM-system color television set in a shrink-type DIP24S package. The LA7640N eliminates the need for adjustment of the discriminator. When used in conjunction with the LA7685J single-chip PAL/NTSC system LSI, it becomes possible to process color television signals for multiple systems. Note that the LA7640N has a built-in SECAM signal demodulation circuit block and a demodulated signal amplitude modulation circuit block.


Features

- Discriminator requires no adjustment.
- Conversion of SECAM signals into pseudo-NTSC signals (SECAM → pseudo-NTSC transcoder).

Package Dimensions

unit : mm

3067-DIP24S

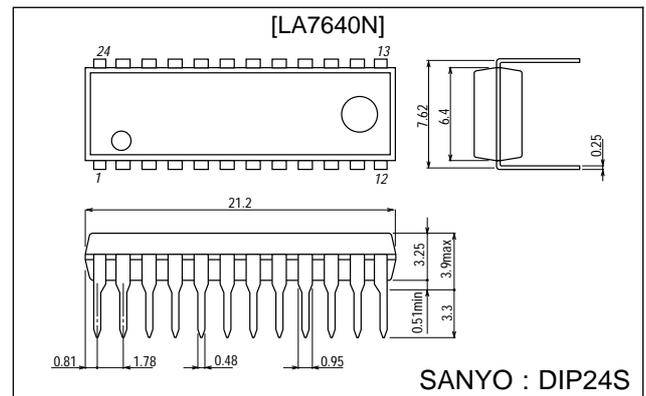

Specifications

Maximum Ratings at Ta = 25 °C

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V _{CCmax}		10	V
Allowable power dissipation	P _{d max}	T _a ≤ 65 °C	650	mW
Operating temperature	T _{opr}		-10 to +65	°C
Storage temperature	T _{stg}		-55 to +150	°C

Operating Conditions at Ta = 25 °C

Parameter	Symbol	Conditions	Ratings	Unit
Recommended supply voltage	V _{CC}		9	V
Operating supply voltage range	V _{CCop}		8 to 10	V

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

SANYO Electric Co., Ltd. Semiconductor Company

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

62695HA(II) No.5151-1/5


LA7640N

Electrical Characteristics at Ta = 25 °C, V_{CC} = 9 V

Parameter	Symbol	Conditions	min	typ	max	Unit
Supply current	I _{CC}		23	33	43	mA
[Chroma Block]						
Killer operating point	Killer		-42	-36	-30	dB
SECAM demodulation output						
B-Y	D _{OUTB}		0.37	0.47	0.56	Vp-p
R-Y	D _{OUTR}		0.53	0.67	0.80	Vp-p
SECAM demodulation output ratio R-Y/B-Y	D _{OUTR/B}		1.0	1.4	1.8	
Modulation output ratio						
R-Y/Burst	M _{OUTB/B}		1.90	2.55	3.10	
R-Y/B-Y	M _{OUTR/B}		0.92	1.30	1.69	
Modulation output burst	M _{OUTB}		65	100	125	mVp-p
Modulation angle B-Y	ANGBY	Burst = 180 °	-10	0	+10	deg
Modulation angle R-Y	ANGRY	Burst = 180 °	80	90	100	deg
Demodulation linirarity	DLIN		80	100	120	%
Modulation linirarity	MLIN		80	100	120	%
[Video Block]						
Voltage gain pin 22	V _{G22}	f = 100 kHz 1 Vp-p, pin 23 GND	-3	0	+3	dB
Voltage gain pin 24	V _{G24}	f = 100 kHz 1 Vp-p, pin 23 V _{CC}	-3	0	+3	dB
Frequency characteristics pin 22	V _{F22}	f = 10 MHz 0.5 Vp-p, pin 23 GND	-4	-1	+2	dB
Frequency characteristics pin 24	V _{F24}	f = 10 MHz 0.5 Vp-p, pin 23 V _{CC}	-4	-1	+2	dB
Dymamic range pin 22	V _{D22}	Pin 23 GND	2.0	2.9		Vp-p
Dymamic range pin 24	V _{D24}	Pin 23 V _{CC}	2.0	2.9		Vp-p
PAL matrix						
PAL Gain +	P _{G+}	f = 4.43 MHz 300mVp-p, pin 23 V _{CC}	3.0	6.0	9.0	dB
PAL Gain -	P _{G-}	f = 4.43 MHz 300mVp-p, pin 23 V _{CC}		-35	-30	dB
SECAM switch						
SECAM Gain 1	SE _{G1}	f = 4.43 MHz 300mVp-p, pin 23 GND	3.0	6.0	9.0	dB
SECAM Gain 2	SE _{G2}	f = 4.43 MHz 300mVp-p, pin 23 GND	3.0	6.0	9.0	dB
SECAM cross-talk 1	S _{C1}	f = 4.43 MHz 300mVp-p, pin 23 GND		-35	-30	dB
SECAM cross-talk 2	S _{C2}	f = 4.43 MHz 300mVp-p, pin 23 GND		-35	-30	dB
[PAL/SECAM Switch Block]						
PAL-side voltage gain	C _{OUTG}	Pin 23 V _{CC}	-3	0	+3	dB
Cross-talk SECAM → PAL	C _{OUTC}				-35	dB
Xtal oscillator oscillation frequency	f _{REQ}		0	97	180	Hz
B.G.P threshold voltage	V _{BGP}	Pin 23 GND	5.7	6.2	6.7	V
V.BLK pulse threshold voltage	V _V	Pin 23 GND	2.6	3.1	3.6	V
Forced PAL threshold voltage	V _{23P}		6.3	6.7	7.1	V
SECAM threshold voltage	V _{23S}		1.8	2.2	2.6	V
SECAM discrimination output voltage	V _{OUTS}			0.15	0.3	V


LA7640N

Block Diagram

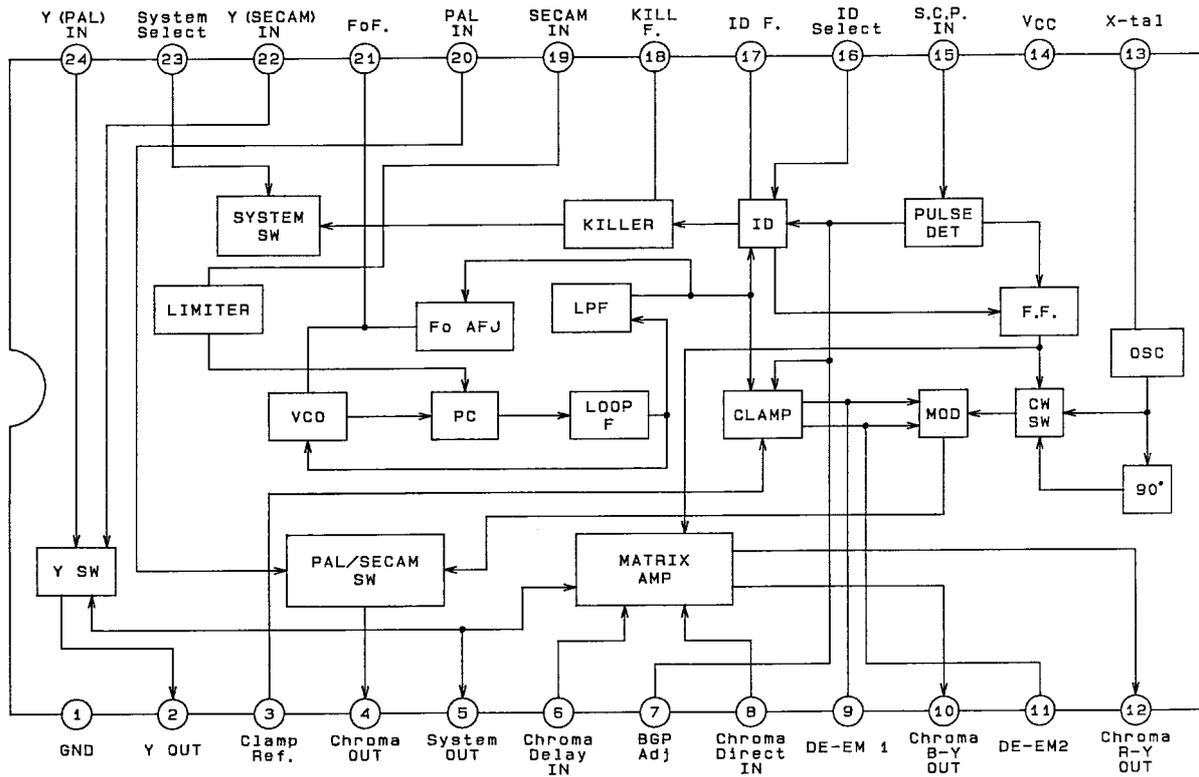

A04071

Test Circuit

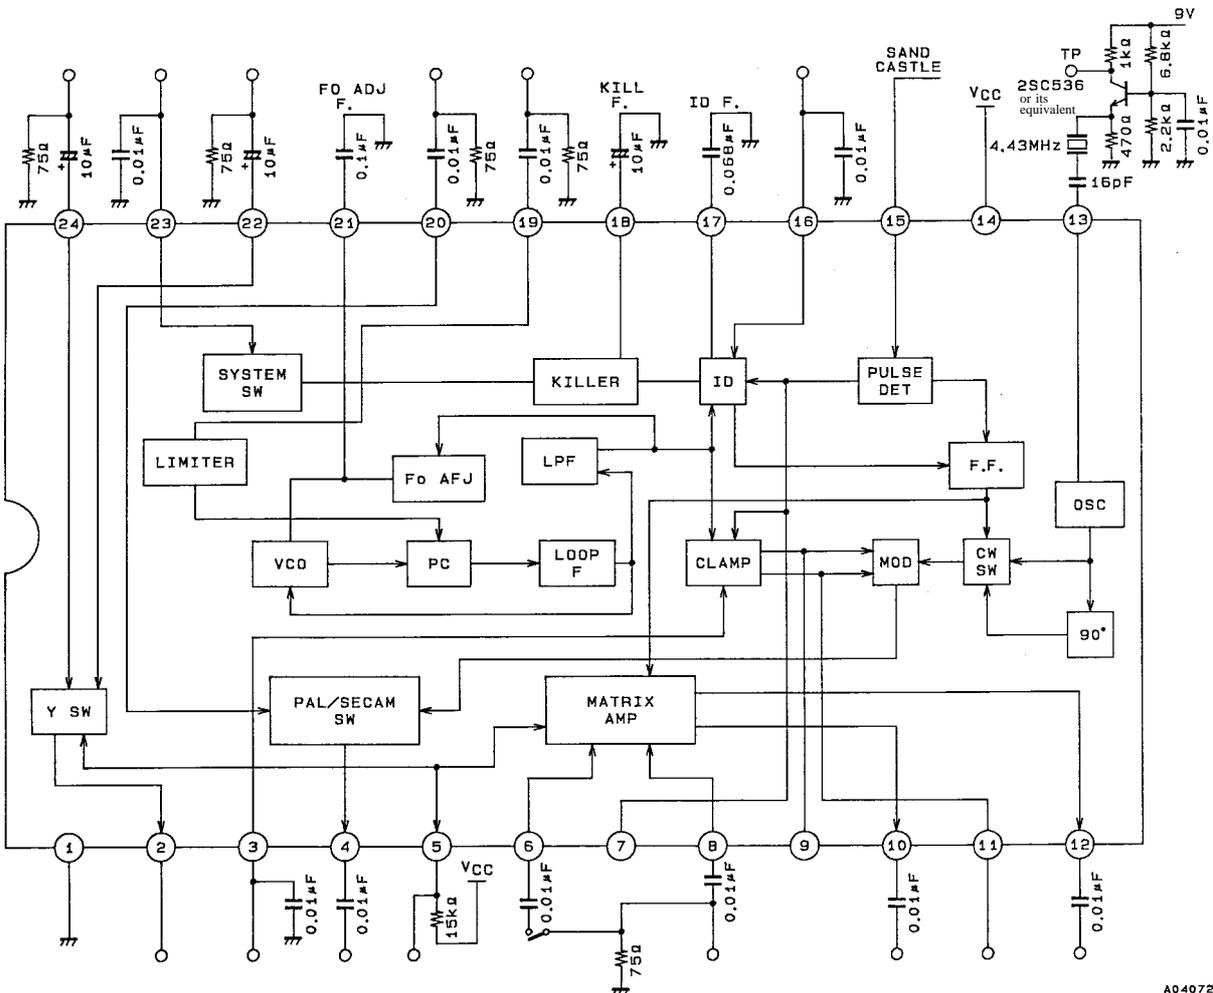


A04072

LA7640N

LA7685J LA7640N Connection Diagram (Reference)

Unit (resistance: Ω , capacitance: F)

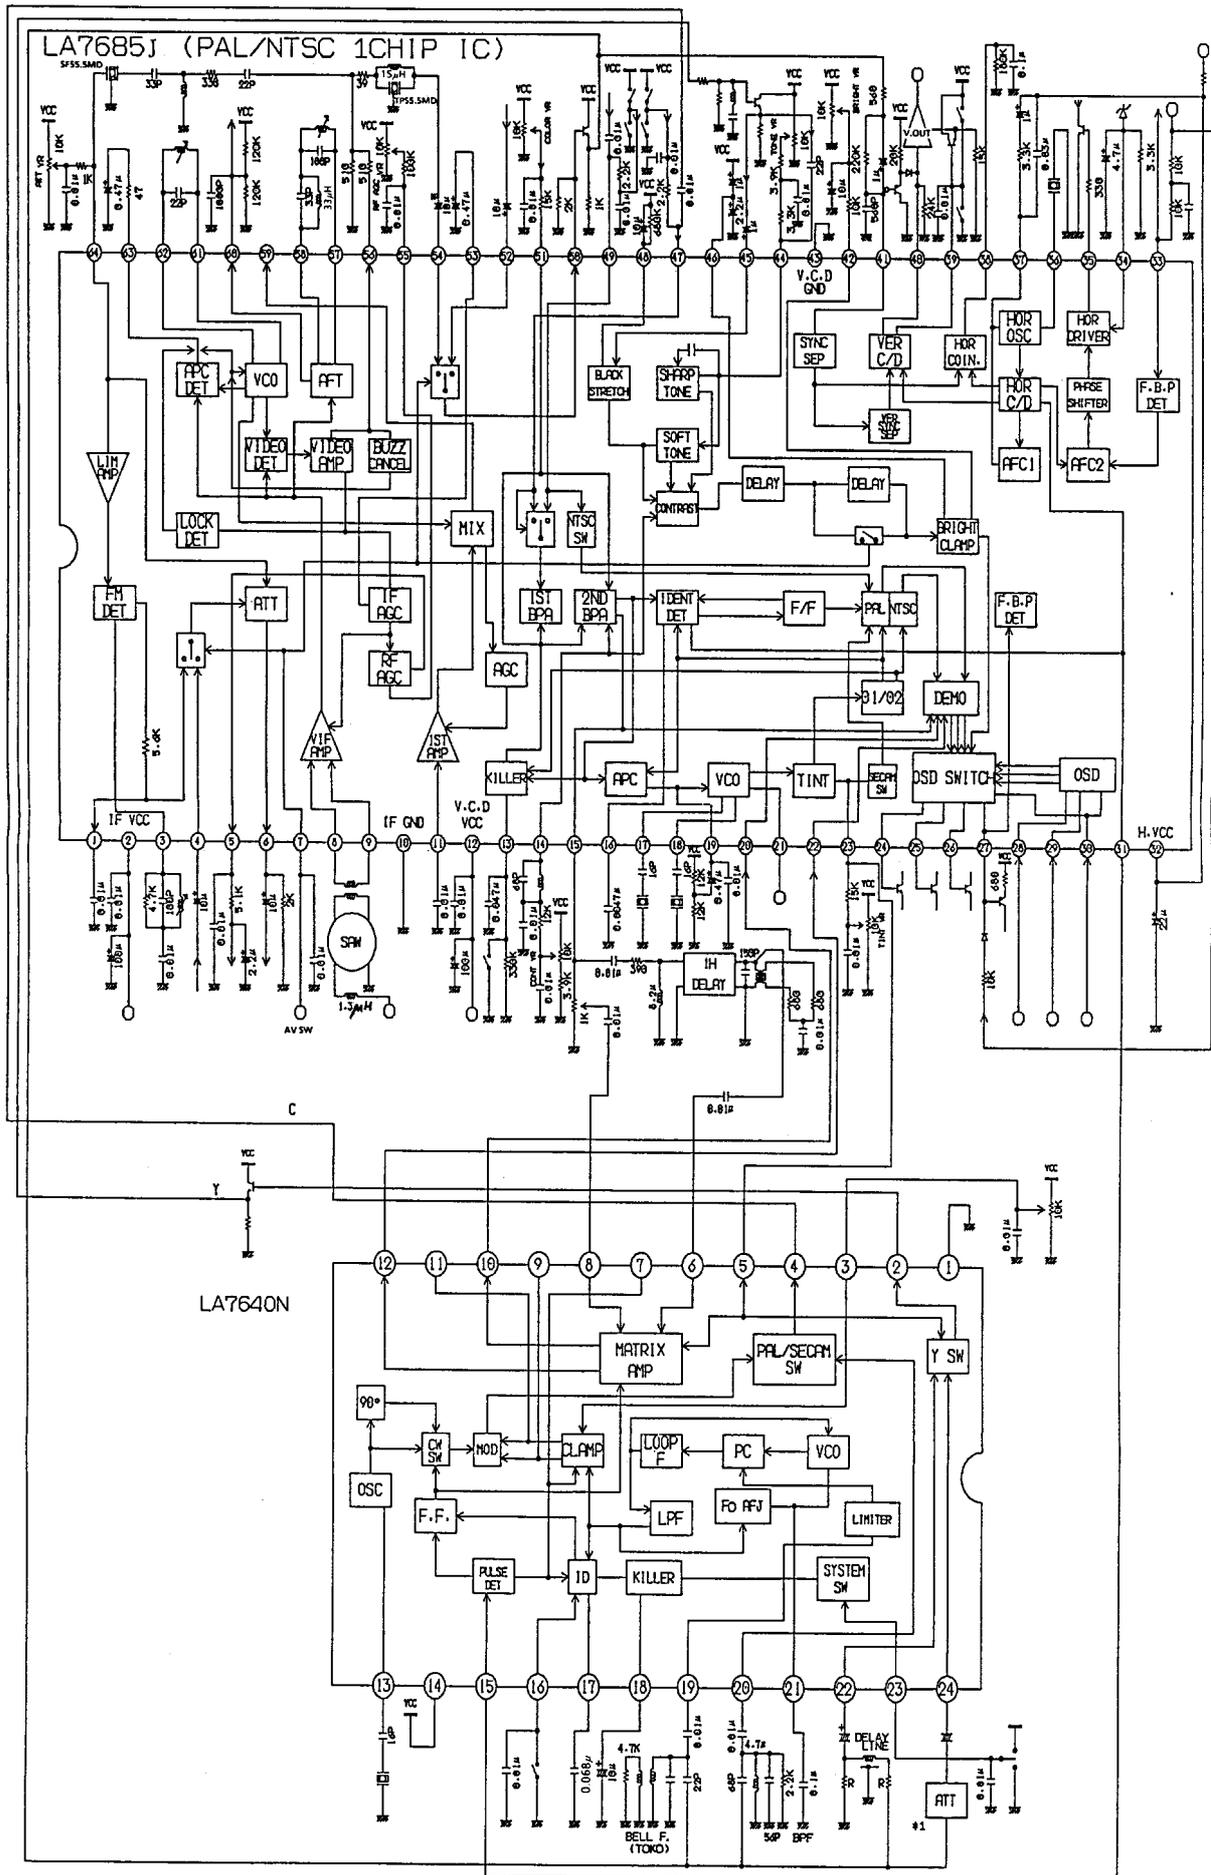

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of June, 1995. Specifications and information herein are subject to change without notice.