


3" Alum / Mg. CONE/ FULL RANGE

- HIGH POWER LOADING DESIGN
- FULL RANGE FREQUENCY RESPONSE
- DIE CAST BASKET
- ALUM/MG CONE WITH SANTOPRENE SURROUND
- CCAW WITH KAPTION BOBBIN

DIAPHRAGM MTL	Alum/Mg
SURROUND MTL	Santoprene
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6.6 Ω
SENSITIVITY 1W/1m	87 dB
FREQUENCY RESPONSE	105-20k Hz
FREE AIR RESONANCE	105 Hz
VOICE COIL DIAMETER	20 mm
AIR GAP HEIGHT	4 mm
RATED POWER INPUT	15 W
MAXIMUM POWER INPUT	30 W
FORCE FACTOR, BL	3.89 TM
MAGNET WEIGHT (8oz)	216 g
MOVING MASS	2 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	1152MN ⁻¹
EFFEC.PISTON AREA	0.0032M ²
Levc	0.2034mH
Zo	70.3552ohm
X-max	1 mm
Vas	1.7 Litr.
Qts	0.52
Qms	5.51
Qes	0.57

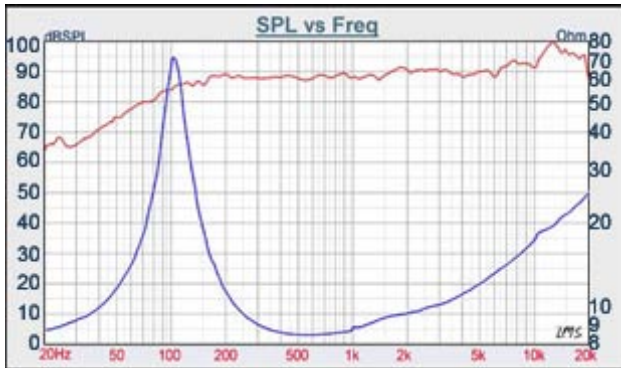

P.O. BOX 10-53 NEI HU, TAIPEI, TAIWAN
 VOICE 886.2.26570282 FAX 886.2.26580168