
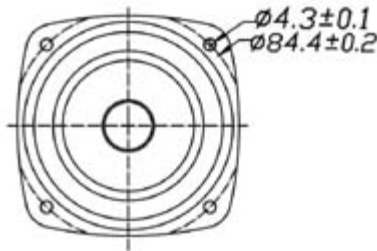


F SERIES

W3-594S

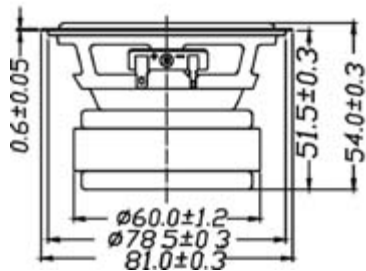

- UNDERHUNG DESIGN
- HIGH POWER LOADING DESIGN
- FULL RANGE FREQUENCY RESPONSE
- STAMPED STEEL BASKET
- PAPER CONE WITH SANTOPRENE SURROUND
- MAGNETICALLY SHIELD
- ALUMINUM PHASE PLUG DESIGN

3" PAPER MID-RANGE / FULL RANGE

DIAPHRAGM MTL Paper

SURROUND MTL Santoprene

NOMINAL IMPEDANCE 8 Ω

DCR IMPEDANCE 6.6 Ω

SENSITIVITY 1W/1m 87 dB

FREQUENCY RESPONSE 100 - 20K Hz

FREE AIR RESONANCE 100 Hz

VOICE COIL DIAMETER 20 mm

AIR GAP HEIGHT 6 mm

RATED POWER INPUT 15 W

MAXIMUM POWER INPUT 30 W

FORCE FACTOR, BL 3.3 TM

MAGNET WEIGHT (4 oz) 120 g

MOVING MASS 1.60 g

FERRO FLUID ENHANCED No

SUSPENSION COMPL. 1234 MN⁻¹

EFFEC.PISTON AREA 0.0032 m²


X-max 0.4 mm

Vas 1.8 Litr

Qts 0.64

Qms 6.59

Qes 0.71

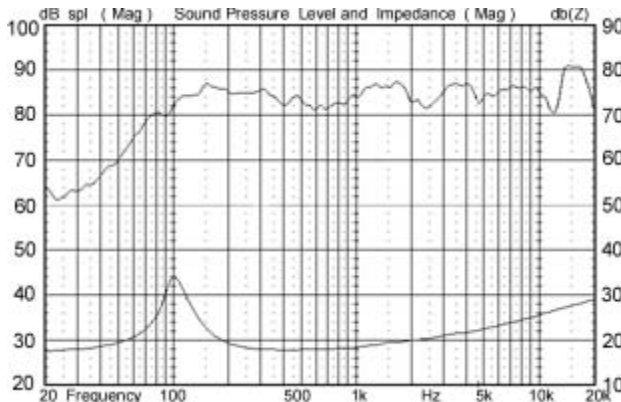

P.O. BOX 10-53 NEI HU, TAIPEI, TAIWAN
VOICE 886.2.26570282 FAX 886.2.26580166

CLOSE