

2SA1285, 2SA1285A

FOR PRE-DRIVE APPLICATION
SILICON PNP EPITAXIAL TYPE

DESCRIPTION

2SA1285, 2SA1285A is a silicon PNP epitaxial type transistor. Designed with high voltage, high h_{FE} , high f_T , small C_{ob} and excellent h_{FE} lineary.

Complementary with 2SC3245, 2SC3245A.

FEATURE


- High voltage $V_{CE0}=120, 150V$
- High f_T $f_T=200MHz$, low C_{ob} $C_{ob}=3.5pF$ typ
- High h_{FE} $h_{FE}=150$ to 800
- High collector dissipation $P_C=900mW$

APPLICATION

Pre-drive level of output 40 to 80W main amp. End level of tone control amp, equalizer amp.

OUTLINE DRAWING

Unit:mm

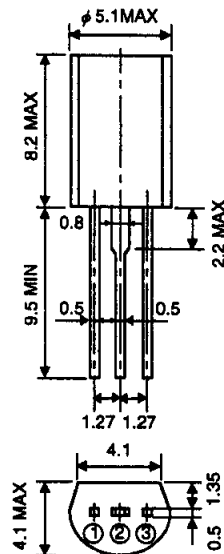

TERMINAL CONNECTOR

- ① : EMITTER
② : COLLECTOR
③ : BASE
- EIAJ : —
JEDEC : —

Note)

The dimension without tolerance represent central value.

MAXIMUM RATINGS ($T_a=25^{\circ}C$)

Symbol	Parameter	Ratings		Unit
		2SA1285	2SA1285A	
V_{CBO}	Collector to Base voltage	-120	-150	V
V_{EBO}	Emitter to Base voltage	-5	-5	V
V_{CEO}	Collector to Emitter voltage	-120	-150	V
I_C	Collector current	-100		mA
P_C	Collector dissipation	900		mW
T_j	Junction temperature	+150		$^{\circ}C$
T_{stg}	Storage temperature	-55 to +150		$^{\circ}C$

ELECTRICAL CHARACTERISTICS ($T_a=25^{\circ}C$)


Symbol	Parameter	Test conditions	Limits						Unit
			2SA1285			2SA1285A			
			Min	Typ	Max	Min	Typ	Max	
V(BR)CBO	C to B break down voltage	Ic = -10 μA, IE= 0	-120			-150			V
V(BR)EBO	E to B break down voltage	IE = -10 μA, Ic=0	-5			-5			V
V(BR)CEO	C to E break down voltage	Ic = -1mA, RBE= ∞	-120			-150			V
ICBO	Collector cut off current	VCB = -100 V, IE=0			-0.1			-0.1	μ A
IEBO	Emitter cut off current	VEB = -4V, Ic=0			-0.1			-0.1	μ A
hFE *	DC forward current gain	VCE= -10V, Ic= -10mA	150		800	150		500	—
VCE(sat)	C to E saturation voltage	Ic = -50mA, IB= -2.5mA		-0.17	-0.6		-0.17	-0.6	V
fT	Gain band width product	VCE= -10V, IE= 10mA		200			200		MHz
Cob	Collector output capacitance	VCB= -10V, IE= 0, f=1MHz		3.5			3.5		pF

* : It shows h_{FE} classification in right table.


Item	E	F	G
h_{FE}	150 to 300	250 to 500	400 to 800

TYPICAL CHARACTERISTICS


COLLECTOR DISSIPATION VS.
AMBIENT TEMPERATURE

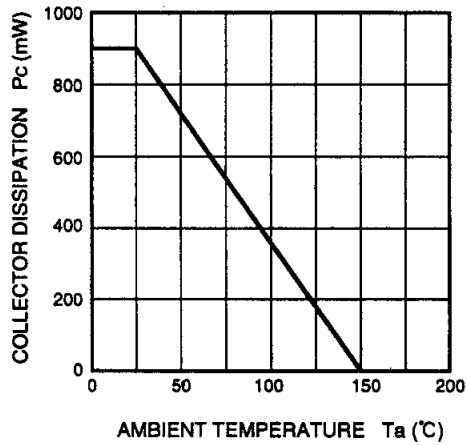


COMMON EMITTER OUTPUT

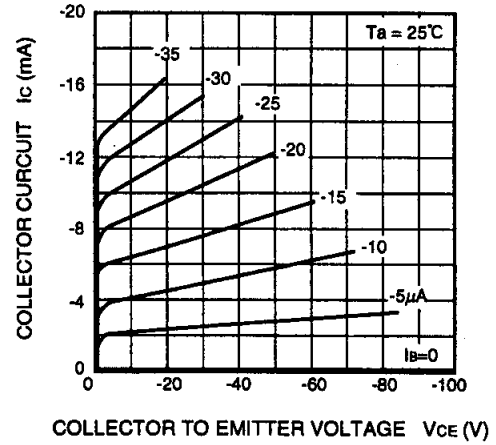


COMMON EMITTER TRANSFER

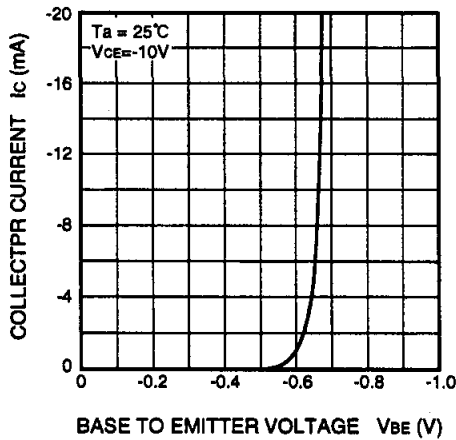


DC FORWARD CURRENT GAIN VS.
COLLECTOR CURRENT

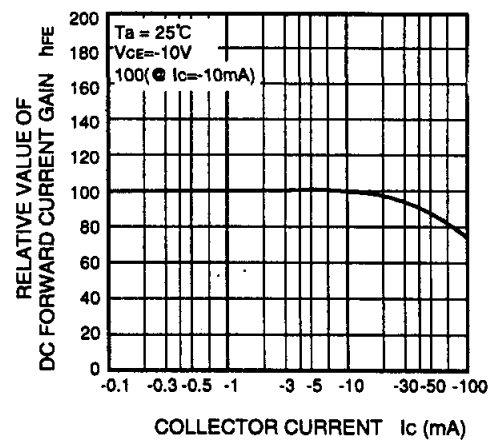


GAIN BAND WIDTH PRODUCT VS.
EMITTER CURRENT

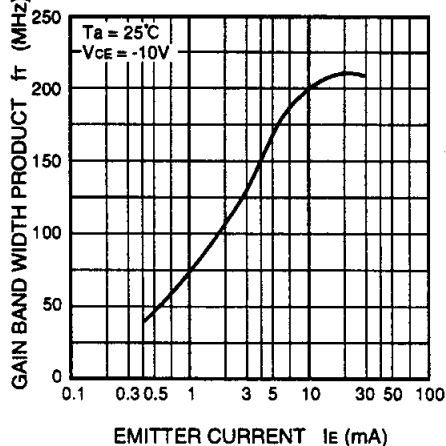


COLLECTOR OUTPUT CAPACITANCE VS.
COLLECTOR TO BASE VOLTAGE

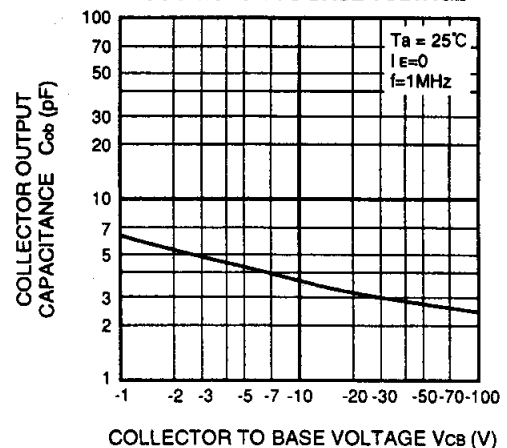

h PARAMETER VS. EMITTER CURRENT

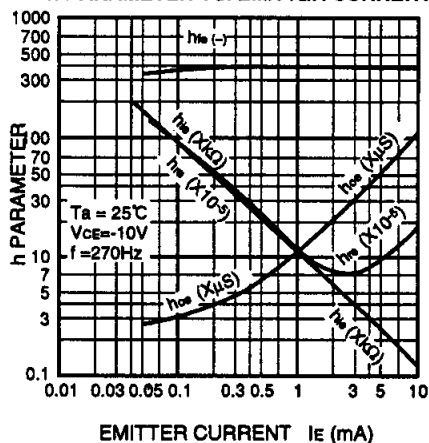

h PARAMETER VS. COLLECTOR-EMITTER VOLTAGE

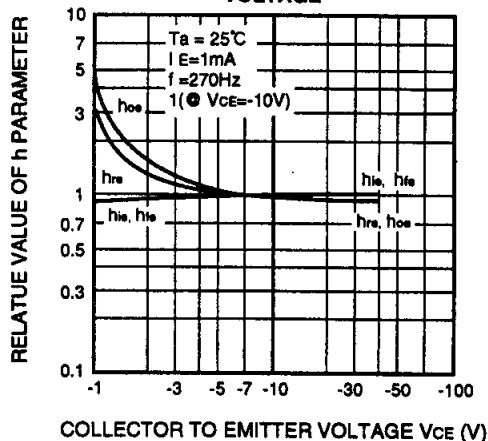

COMMON EMITTER h PARAMETER (TYPICAL VALUE)

Symbol	Parameter	Test Conditions	Limits	Unit
h_{ie}	Closed loop small signal input impedance	$T_a = 25^\circ\text{C}$ $V_{CE} = -10\text{V}$ $I_E = 1\text{mA}$ $f = 270\text{Hz}$	10.8	$k\Omega$
h_{re}	Open loop small signal reverse voltage amplification factor		1.16	$\times 10^{-4}$
h_{fe}	Closed loop small signal forward current amplification factor		400	—
h_{oe}	Open loop small signal output admittance		11.2	μS



<http://www.idc-com.co.jp>
6-41, TSUKUBA, ISAHAYA, NAGASAKI, 854-0065, JAPAN

Keep safety in your circuit designs !

Isahaya Electronics Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

- These materials are intended as reference to assist out customers in the selection of the Isahaya semiconductor product best suited to the customer's application, they do not convey any license under any intellectual property rights, or any other rights, belonging to Isahaya Electronics Corporation or a third party.
 - Isahaya Electronics Corporation assumes no responsibility for any damage, or infringement of any third-party rights, originating in the use of any product data, diagrams, charts or circuit application examples contained in the materials.
 - All information contained in these materials, including product data, diagrams and charts, represent information on products at the time of publication of these materials, and are subject to change by Isahaya Electronics Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Isahaya Electronics Corporation or authorized Isahaya Semiconductor product distributor for the latest product information before purchasing a product listed herein.
 - The prior written approval of Isahaya Electronics Corporation is necessary to reprint or reproduce in whole or in part these materials.
 - If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination. Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
 - Please contact Isahaya Electronics Corporation or an authorized Isahaya Semiconductor product distributor for further details on these materials or the products contained therein.
-

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.