

AM TUNER UNIT (W14-008)
CAPACITORS

Symbol	Description			Part No.
C1	Ceramic	0.04	+100%	25V
C2	Ceramic	0.04	+100%	25V
C3	Ceramic	0.04	+100%	25V
C4	Ceramic	0.04	+100%	25V
C5	Ceramic	0.04	+100%	25V
C7	Mylar	0.01	±20%	50V
C8	Styrol	410P		50V
C9	Ceramic	0.04	+100%	25V
C10	Ceramic	0.04	+100%	25V
C11	Ceramic	0.04	+100%	25V
C12	Ceramic	0.04	+100%	25V
C13	Ceramic	0.04	+100%	25V
C14	Electrolytic	10		10V
C15	Ceramic	0.04	+100%	25V
C16	Electrolytic	10		16V
C17	Ceramic	0.04	+100%	25V
C18	Ceramic	0.04	+100%	25V
C19	Ceramic	3P		50V
C20	Ceramic	47P		50V
C21	Ceramic	0.04	+100%	25V
C22	Electrolytic	220		16V
C23	Ceramic	0.04	+100%	25V
C24	Mylar	0.004	±20%	50V
C25	Mylar	0.002	±20%	50V

RESISTORS


Symbol	Description			Part No.
R1	Carbon film	4.7k		
R2	Carbon film	1k		
R3	Carbon film	1k		
R4	Carbon film	1k		
R5	Carbon film	4.7k		
R6	Carbon film	22k		
R7	Carbon film	3.3k		
R8	Carbon film	1k		
R9	Carbon film	1k		
R10	Carbon film	33k		
R11	Carbon film	82		
R12	Carbon film	470		
R13	Carbon film	1k		
R14	Carbon film	100		
R15	Carbon film	4.7k		
R16	Carbon film	100k		
R17	Carbon film	470		
R18	Carbon film	1k		
R19	Carbon film	4.7k		
R20	Carbon film	27k		
R21	Carbon film	22k		
R22	Carbon film	470		
R23	Carbon film	470		
R24	Carbon film	1k		
R25	Carbon film	100		
R26	Carbon film	3.3k		
R27	Carbon film	6.8k		
R28	Carbon film	220k		

TRANSFORMERS AND COILS

Symbol	Description	Part No.
T1	RF Coil	T41-008-0
T2	OSC Coil	T43-007-0
T3	IF Transformer	T71-025-0
T4	IF Transformer	T71-025-0
T5	IF Transformer	T72-017-0

TRANSISTORS AND DIODES

Symbol	Description	Part No.
Q1	2SC461-A Transistor	
Q2	2SC460-A	
Q3	2SC460-A	
Q4	2SC460-A	
Q5	2SC460-A	
D1	1N60 Diode	
D2	1N60	
D3	1N60	
D4	1N60	

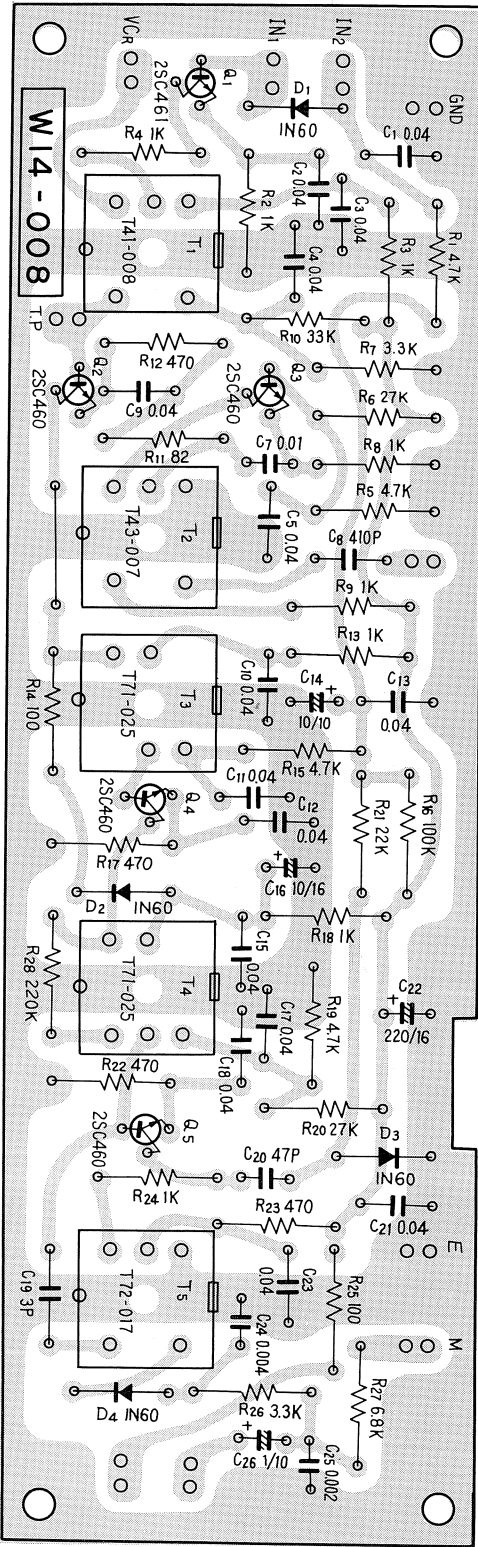

HEAD AMP UNIT (W21-001)
CAPACITORS


Symbol	Description			Part No.
C1	Electrolytic	10		10V
C2	Electrolytic	10		10V
C3	Ceramic	100P		50V
C4	Ceramic	100P		50V
C5	Electrolytic	100		6V
C6	Electrolytic	100		6V
C7	Mylar	0.01		50V
C8	Mylar	0.01		50V
C9	Mylar	0.003		50V
C10	Mylar	0.003		50V
C11	Ceramic	330P		50V
C12	Ceramic	330P		50V
C13	Electrolytic	10		15V
C14	Electrolytic	10		15V
C15	Electrolytic	10		15V
C16	Electrolytic	10		15V
C17	Electrolytic	50		25V

RESISTORS

Symbol	Description			Part No.
R1	Carbon film	3.3k		
R2	Carbon film	3.3k		
R3	Carbon film	470k		
R4	Carbon film	470k		
R5	Carbon film	1M		
R6	Carbon film	1M		
R7	Carbon film	330k		
R8	Carbon film	330k		
R9	Carbon film	470k		
R10	Carbon film	470k		
R11	Carbon film	330		
R12	Carbon film	330		
R13	Carbon film	56k		
R14	Carbon film	56k		
R15	Carbon film	4.7k		
R16	Carbon film	4.7k		
R17	Carbon film	3.3k		
R18	Carbon film	3.3k		
R19	Carbon film	270k		
R20	Carbon film	270k		
R21	Carbon film	22k		
R22	Carbon film	22k		
R23	Carbon film	2.2k		
R24	Carbon film	2.2k		
R25	Carbon film	10k		
R26	Carbon film	10k		
R27	Carbon film	47k		
R28	Carbon film	47k		

TRANSISTORS

Symbol	Description	Part No.
Q1	2SC458LG C or B	
Q2	2SC458LG	
Q3	2SC458LG	
Q4	2SC458LG	
Q5	2SC458LG	
Q6	2SC458LG	

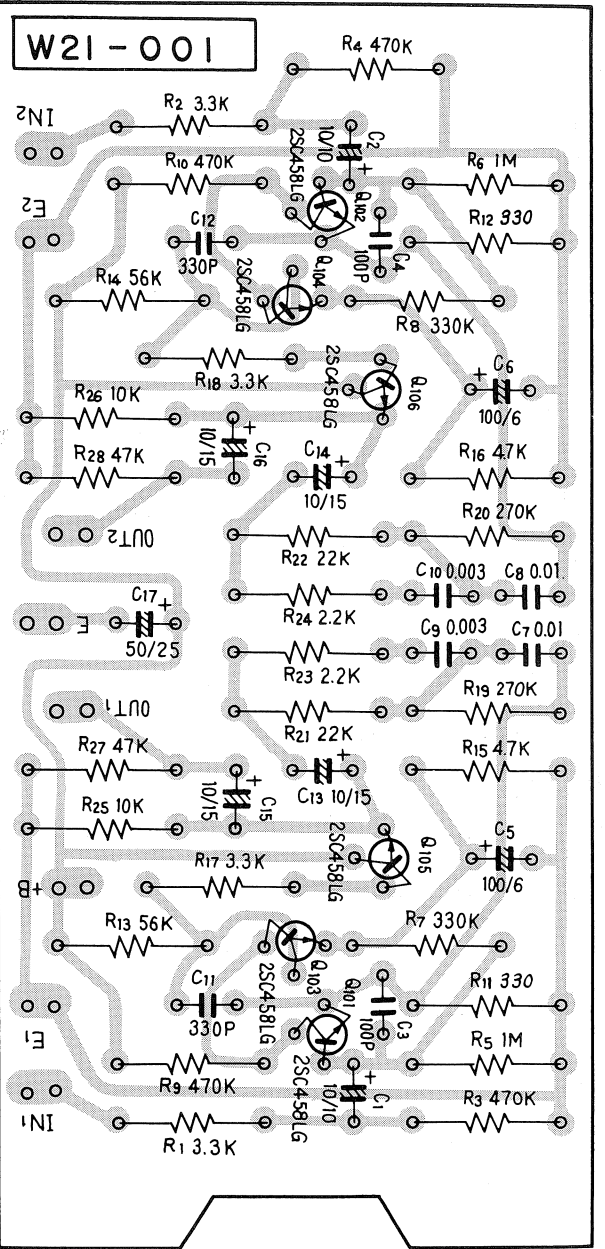

CONTROL AMP UNIT (15-079)
CAPACITORS

Symbol	Description			Part No.
C1	Electrolytic	0.47		25V
C2	Electrolytic	0.47		25V
C3	Ceramic	10P		50V
C4	Ceramic	10P		50V
C5	Electrolytic	0.22		25V
C6	Electrolytic	0.22		25V
C7	Electrolytic	100		35V
C8	Electrolytic	100		35V
C9	Electrolytic	1		16V
C10	Electrolytic	1		16V
C11	Mylar	0.0047		50V
C12	Mylar	0.0047		50V
C13	Mylar	0.0047		50V
C14	Mylar	0.0047		50V
C15	Electrolytic	33		6.3V
C16	Electrolytic	33		6.3V
C17	Electrolytic	50		25V
C18	Electrolytic	50		25V